
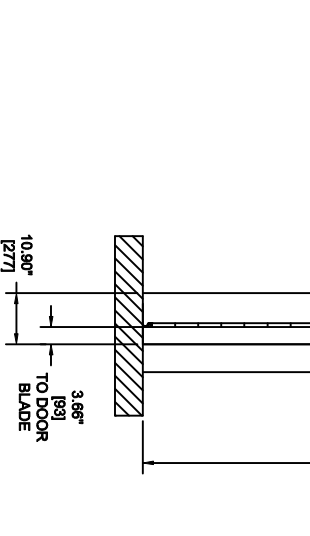


FRONT VIEW

= RECOMMENDED CLEARANCES



SIDE VIEW

NOTE:
1. RH DRIVE SIDE SHOWN, LH OPPOSITE

OPENING SIZE	W=	H=
MFG. DOOR SIZE	W=	H=
DRIVE SIDE	RH	LH
PRIMARY VOLTAGE	208-240	440-480
WINDOWS	* YES	NO
INSULATED PANELS	YES	NO
POWDER COATED PAINT	YES	NO
PUSHBUTTON	YES	<901>
PULL SWITCH	YES	<911>
FLOOR LOOP	YES	<930>
PHOTOCELLS	THRU BEAM	<940>
	REFLECTIVE	<941>
MOTION DETECTOR	YES	<950>
RADIO RECEIVER	YES	<925>

COMMENTS:

CUSTOMER: _____
 LOCATION: _____
 DEALER/SALESMAN: _____
 DOOR # _____ DATE: _____
 APPROVED BY: _____
 APPROVED WITH CHANGES AS NOTED BY: _____

Tolerances according to
 ANSI Y 14.5
 unless otherwise noted
 X=±0.1 fractions = ±1/32
 XX=±0.01
 XXX=±0.005
 ∠=±0.5°

Scale DRAWING SCALE Surface treatments
 Weight kg/Sf
 Material Spec

Model: RR3000 XL APPROVAL DRAWING
 Description: _____
 Designer: JCR Date: 11-11-05
 Released

Rev	A	SIDE FRAME DEPTH & WIDTH	4/1/06	JLR
		Change	Date	Name